
NERI

Project location:	Fixture type: Qty:
Project name:	Notes:

ALKES | POLE | STEEL | ARCH POLE FOR ROUNDABOUTS | MAX 1 LIGHT SOURCE

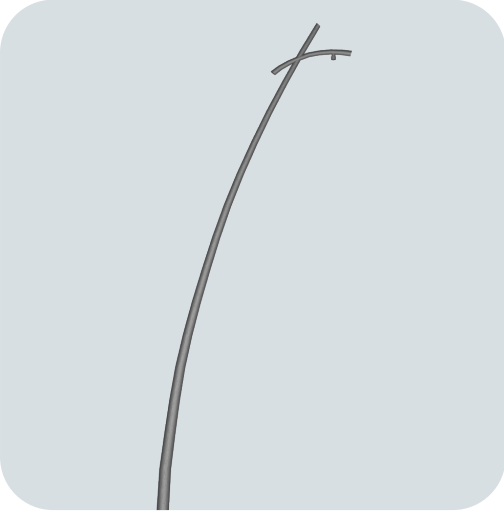

CE

ORDERING INFORMATION / GUIDE

Example**: AL0001209-N-BM-EPC-GG1-HC0575-ZD114060-CN0**

GROUND FIXING	SHAPE	TOP SET UP / LIGHT POINTS	HEIGHT	SECTION	FINISH
BM Buried root	**EPC** Conical	**GG1** Suspended post top | Max 1 light source	**HC0575** 5750 mm	**ZD114060** Base 114 - Top 60 mm	**CN0** Grey [Neri] Textured
BF Flanged			**HC0800** 8000 mm	**ZD144060** Base 144 - Top 60 mm	
			HC0900 9000 mm	**ZD154060** Base 154 - Top 60 mm	

Generated code: **AL0001209 - N** - _ _ - _ _ _ - _ _ _ - _ _ _ _ _ _ - _ _ _ _ _ _ _ _ _ - _ _ _

CONFIGURATION NOTES
The product features shown in this datasheet cannot always be freely combined.
To verify the configurations actually available and define the corresponding product code, please use the configurator available on our website.

ON REQUEST
Non-standard variants and configurations available upon request. Please contact Neri for further information.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.

ALKES | POLE | STEEL | ARCH POLE FOR ROUNDABOUTS | MAX 1 LIGHT SOURCE

MECHANICAL CHARACTERISTICS

Lighting pole in S235 UNI EN 10025, with longitudinal weld ground smooth, hot-dip galvanized in accordance with UNI EN ISO 1461. CE-certified pole, compliant with standard UNI EN 40-5.

Section: Base/Top 114/60 mm, 144/60 mm, 154/60 mm
Hatch size: 132x38 mm, 186x45 mm
Height under ground: 600 mm, 800 mm

Slot height below ground line for cable entry: 150x50 mm
Weight: 50.1-85.2 kg
Finish: Grey [Neri] Textured

WARNINGS

Protection of surfaces: please refer to the specification on painting procedures of the materials.

Property of Neri S.p.A. - Reproduction and use for unauthorized purposes is prohibited.
Neri reserves the right to make changes to its products and documentation without prior notice.