

Description

Lamp post in UNI EN 1561 cast iron and UNI EN10219-1 steel, hot-galvanized to UNI EN ISO 1461 standards, composed as follows:



Tapered post (A) in steel with a circular cross-section, hot-galvanized, made up of two tubes welded together at their junction (B), with dimensions diam. 152 x 1200 mm – diam. 102 x 4200 mm. The post is designed to be attached to a foundation plinth (P) by means of a flange (diam. 266 mm - thickness 18 mm). It is provided with an M10 earthing bolt marked by a small indicator plate, a slot (C – height 186 x 45 mm) for the installation of a class II insulation terminal board with or without fuse; die-cast aluminium hatch (D) for closing the slot (C) with IP54 protection rating; The top of the post has six M10 screws (Z) for securing a suspension bracket fitted into the post.

1°) Cast iron base (height 350 mm) with a circular plinth (diam. 300 mm). The top of the base has three M8 (E) stainless steel grubscrews for securing it to the post.

2°) cast iron decorative ring, to be fitted where the post is tapered. The element has three M8 stainless steel grubscrews for securing it to the post.


Shapes and measurements as indicated in the drawing.

The total height is 5400 mm.


Total weight is 90 Kg.

Protection of surfaces


Please refer to the specification on painting procedures of the materials.

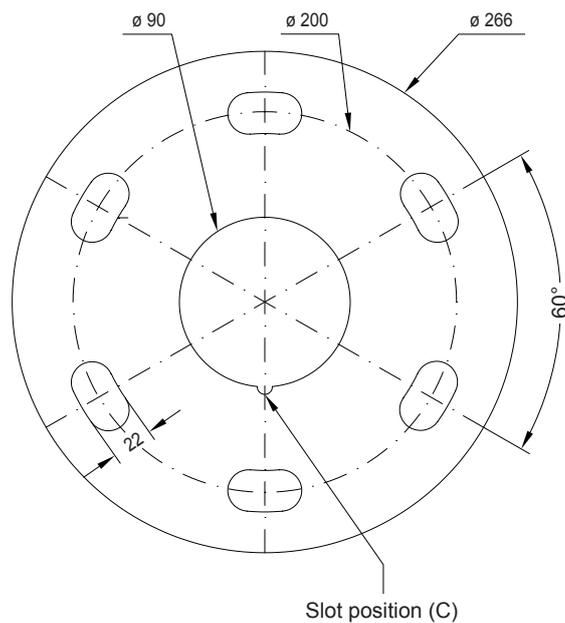

Flange plan
Scale 1:4



Exploded

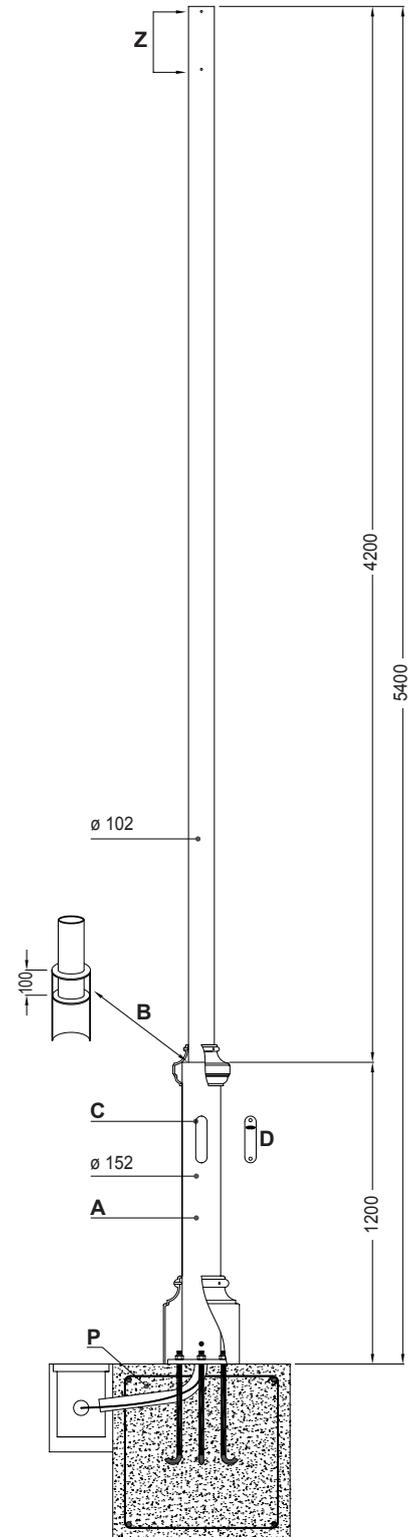

Section

NB: The measurements are in millimeters.

Neri S.p.A. Property - Any reproduction and use for its own purposes is forbidden.