

**Use**

Suitable support for suspended light fixtures.

**Materials**

Made in UNI EN 1561 cast iron, UNI EN 1563 nodular cast iron and S235J UNI EN 10219-1 steel, hot dip galvanized according to UNI EN ISO 1461.

Screws in stainless steel.

**Description**

The top section is made up of the following elements:

- 1°) A hot-galvanized steel tube height 226.5 cm (Ø 6.0 cm) for the coupling on the posts with 10.2 cm of diameter; it is provided of a flange (A - Ø 7.5 cm) and holes (Ø 2.0 cm) for the passage of power supply cable (F).
- 2°) Cast iron junction cast in a single piece, height 11.5 cm.
- 3°) A ring in hot-galvanized steel for lower support of the suspension brackets. It is secured to the supporting tube (1°) with two M8 grubs.
- 4°) A ring in hot-galvanized steel for upper support of the suspension brackets. The ring has four holes (B - Ø 1.8 cm) for the passage of power supply cable. It is secured to the supporting tube (1°) with two M8 grubs.
- 5°) A suspension bracket height 144.5 cm, with a protrusion of 93 cm. Structurally the bracket is composed of a tube in steel (Ø 4.2 cm), decorations (D, E) in cast iron and support attachments (C) in spheroidal cast iron. The entire assembly is hot galvanized. The brackets is fixed to the support rings 3° - 4° with four M8 screws. At the end of each suspension bracket there is a connection (F) in cast iron with internal thread G3/4" for attaching the light fixture. The power cables pass inside each suspension brackets (G).
- 6°) A terminal element in cast iron height 20 cm fixed onto element (1°) and is secured with a M8 screws (H).
- 7°) Two decorative elements in cast iron. Each element is secured with two M8 screws to support rings (3°) and (4°).



**Dimensions and weight**

Height 212 cm; width 93 cm.

Weight 47.4 kg.

**Protection of surfaces**

Please refer to the specification on painting procedures of the materials.

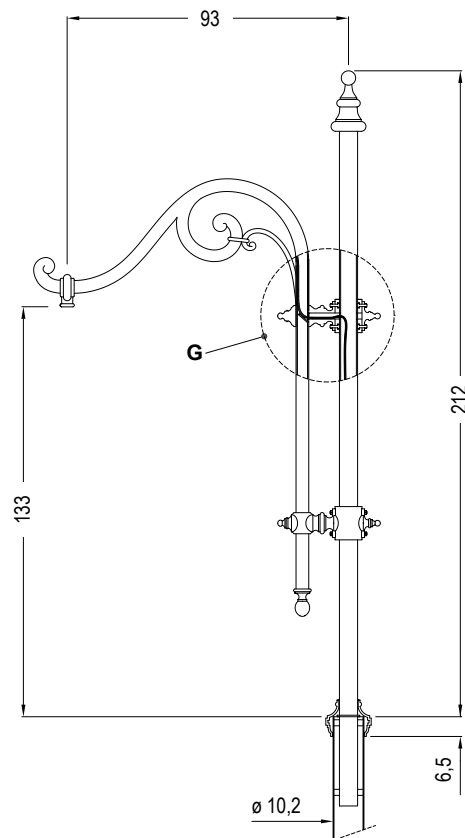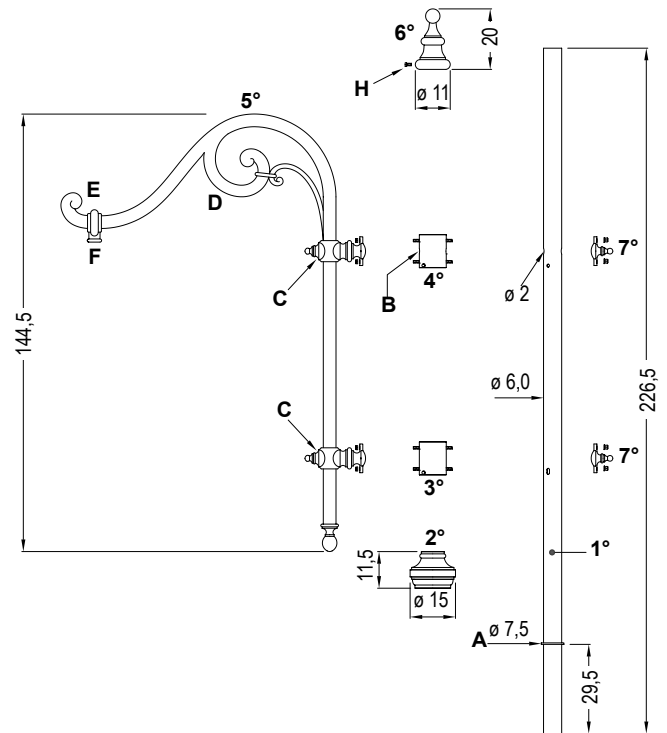

**NB:** The measurements are in millimeters.

**Neri S.p.A. Property** - Any reproduction and use for its own purposes is forbidden.