


Project location:	
Project name:	
Model code #:	Date

Fixture type:	
Rev.	05/2021

## Brenta Wall mounted luminaire S

Source	LED
Voltage	120V-277V
Frequency	50/60Hz
EPA	-
Weight	7.1lb
Height	4"
Length	6 1/2"

Brenta is our homage to one of the most beautiful and evocative materials in the history of architecture: the strong but malleable, fluid but solid, durable but artisanal, sustainable but sexy concrete.



Mounting	Series	Optic system	CCT	Lumen output	Driver function	Accessories
Wall mounted	Brenta	Type IV	2700K	1314	1-10V	-
		Type V	3000K	1011		
			3500K	1408		
			4000K	1040		

### SPECIFICATIONS:

#### Materials:

- Concrete (NeriConcrete)
- Prismatic flat glass (IK08 - EN 62262)
- Opal flat glass on request.
- Stainless steel fastening elements.

#### Mounting:

- On the ground with fastening flange at the base.

### NERI CONCRETE

#### Features

NeriConcrete is an HPC concrete (High Performance Concrete), resistant to bending and compression as shown in the table below:

#### Performance

Flexural strength, EN 1015-11	a 28gg	MPa	13
Compressive strength, EN 1015-11	a 28gg	MPa	75

#### Realization

NeriConcrete is a flexible mixture able to adapt to any type of mold, obtained by mixing:

- Powders and concrete components;
- Polymeric fibers;
- Colored pigments;
- Water.

#### Impermeability

The surface treatment makes NeriConcrete water repellent and anti-stain.

#### Operations and maintenance

Use a soft cloth dampened with water and neutral detergents for routine cleaning. Do not use power washing, sandblasting, brushing and scraping, denaturated alcohol, products containing bleach or highly basic pH.

#### Finish:

- Concrete
- The smooth finish is the result of a very fluid mixture and the quality and type of the molds used.

### TECHNICAL DATA:

#### Electrical and optical features:

- Voltage: 120-277V (universal).
- Frequency: 50-60Hz.
- Protection rating: IP55, IK08
- Light source: power LEDs (DMC Nichia)
- Heat sink in aluminium inside to the cover for optimal control of temperature.
- Estimated life (EN 62722-2-1, LM80 data): L80 B10 80.000h
- Colour Rendering Index: Ra > 80.

### COLOR TEMPERATURE:

#### 2,700K

lm output	Watt	lm/W
PRI 1023	13.0	79
OPA 730	13.0	56

#### 3,000K

lm output	Watt	lm/W
PRI 1023	13.0	79
OPA 730	13.0	56

#### 3,500K

lm output	Watt	lm/W
PRI 1023	13.0	79
OPA 730	13.0	56

#### 4,000K

lm output	Watt	lm/W
PRI 1023	13.0	84
OPA 780	13.0	60

The efficacy (lm/W) on table refers to the complete system.

### DRIVER FUNCTION:

Description
1-10V
- Electronic power supply
- Standard surge protection for differential/common mode 2kV/2kV.
- Estimated life B10 at 100,000 h.

# NERI

## Brenta Wall mounted luminaire S

Source LED

### Photometric values

LM-79 test and reports are performed in accordance with IESNA standards.

Project location:

Project name:

Model code #:

Date

Fixture type:


Rev.

05/2021

### PHOTOMETRIC DIAGRAMS

#### Prismatic glass

LOR 100%

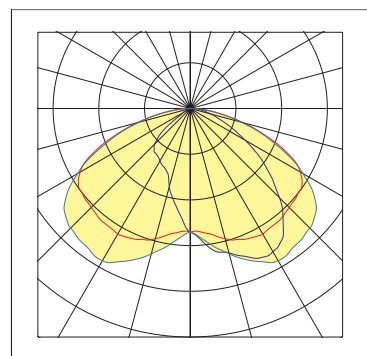

#### Type II


Cut Off



### PHOTOMETRIC DIAGRAMS



#### White glass

LOR 100%

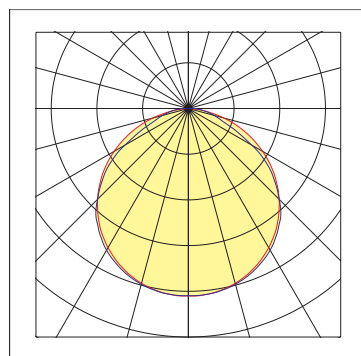

#### Type V

Cut Off

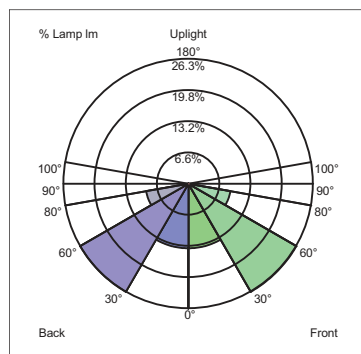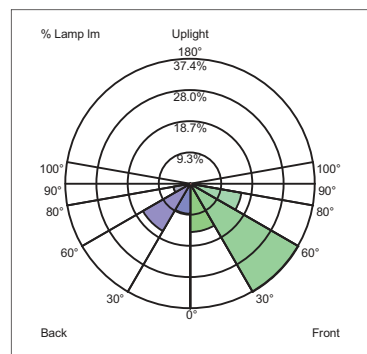

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	14.4 %	14.4 %
FM	30° - 60°	37.4 %	37.4 %
FH	60° - 80°	15.6 %	15.6 %
FVH	80° - 90°	1.6 %	1.6 %
BL	0° - 30°	9.0 %	9.0 %
BM	30° - 60°	16.4 %	16.4 %
BH	60° - 80°	5.1 %	5.1 %
BVH	80° - 90°	0.4 %	0.4 %
UL	90° - 100°	0.0 %	0.0 %
UH	100° - 180°	0.0 %	0.0 %
Totals		100.0 %	100.0 %

N1 - BUG: B0 U0 G1

LCS Zone	Angles	% Lamp	% Lum
FL	0° - 30°	13.6 %	13.6 %
FM	30° - 60°	26.3 %	26.3 %
FH	60° - 80°	9.0 %	9.0 %
FVH	80° - 90°	1.0 %	1.0 %
BL	0° - 30°	13.6 %	13.6 %
BM	30° - 60°	26.3 %	26.3 %
BH	60° - 80°	9.0 %	9.0 %
BVH	80° - 90°	1.0 %	1.0 %
UL	90° - 100°	0.0 %	0.0 %
UH	100° - 180°	0.0 %	0.0 %
Totals		100.0 %	100.0 %

N1 - BUG: B0 U0 G0